


Product Datasheet


Handing - Herline Hinges

Check door width and margin requirements prior to installation stud opening is square, level and is the correct size.

 7 stainless steel RocYork screws are supplied with each hinge.




Australian Handling
Left

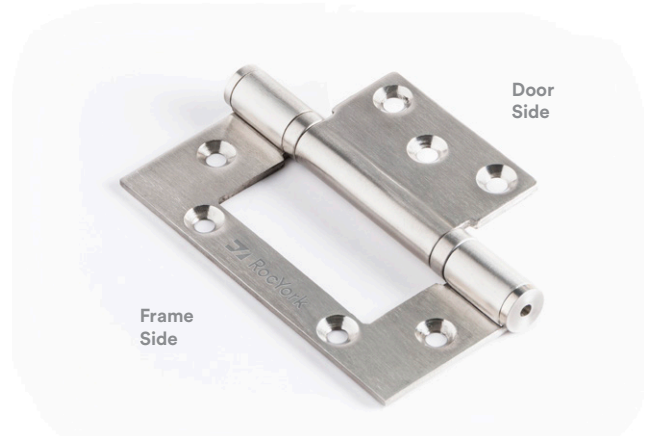

Australian Handling
Right

Handing - Lutoff Hinges

Check door width and margin requirements prior to installation stud opening is square, level and is the correct size. The door side of the lift off hinge must be rebated into the door.


 8 stainless steel RocYork screws are supplied with each hinge.



Australian Handling
Left



Australian Handling
Right



 When ordering be aware that Lift Off hinges are usually left and right handed and that **the part with the pin is attached to the frame pointing up.**

Information contained within this document supersedes all previous versions and is subject to change without notice.

www.ezconcept.com.au For Sales and Technical Enquiries, please visit EZ Concept Australia | 1300 329 526 | sales@ezconcept.com.au

Product Datasheet

Features and Benefits

- In areas such as toilets and bathrooms where doors must be removable in case of emergencies, RocYork hinges are ideal and code compliant.
- The hinges allow for removal of a hinged door without having to unscrew the hinges.
- Lift off RocYork hinges are finished in brushed stainless steel for a look with class and style.
- Easy to fit and time saving.
- Recommended for internal use.
- Lift off hinges are available in both left and right handing.





Lift Off Channel

EzyJamb can be easily adapted for use with removable or 'lift off' doors as required for code compliance when installed in bathrooms or toilets.

As stated in NCC (BCA) 2011 F2.5 (b), "The door to a fully enclosed sanitary compartment must be readily removable from the outside"

This criteria can be met by installing an EzyJamb with Lift Off Hinges and the special Lift Off channel for the header which creates a deep rebate that conceals the service gap above the door.

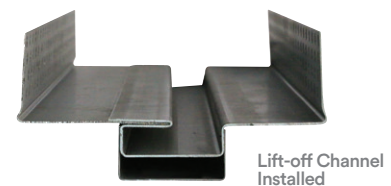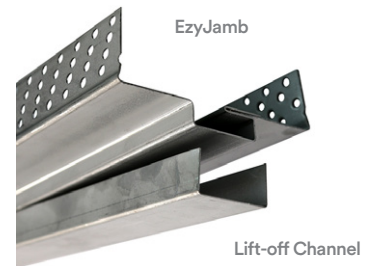

i The Lift Off channel supplied is designed to fit over the header stop and affixed with construction adhesive.

Accreditation/Certification



Further Assistance

Contact the technical engineering team at Studco Technical Services for assistance with specifications, product selection and structural engineering enquiries.

T: 1300 255 255 or email techadvice@studcosystems.com.au